

ZAKUMBAYEVA, G.D.; SOKOL'SKIY, D.V.

Effect of potassium iodide on the catalytic hydrogenation of some
organic compounds. Izv.vys.ucheb.zav.; khim.i khim.tekh. 2
no.3:340-344 '59. (MIRA 13:8)

1. Institut khimicheskikh nauk AN KazSSR i Kazakhskiy gosudarstvennyy
universitet imeni S.M.Kirova.
(Potassium iodide) (Hydrogenation)

SOKOL'SKIY, D.V., akademik; ZAKUMRAYEVA, G.D.

Effect of alkali metal halides on the mechanism of catalytic
hydrogenation of cyclohexane. Dokl. AN SSSR 124 no.4:880-882
P '59. (MIRA 12:1)

1. AN KazSSR (for Sokol'skiy). 2. Institut khimicheskikh nauk
Akademii nauk KazSSR.

(Alkali metal halides) (Cyclohexane)
(Hydrogenation)

ZAKUMBAYEVA, G.D.; SOKOL'SKIY, D.V.

Effect of alkali metal halides on the hydrogenation rate of
cyclohexene and mesityl oxide over palladium black. Trudy
Inst.khim.nauk AN Kazakh.SSR 7:3-12 '61. (MIRA 15:8)
(Alkali metal halides) (Hydrogenation)
(Cyclohexene) (Penetenone)

SOKOL'SKIY, D.V., akademik, glav. red.; POPOVA, N.M., kand.
khim. nauk, red.; ZAKUMBAYEVA, G.D., kand. khim. nauk,
red.; BULAVKINA, L.A., kand. khim. nauk, red.;
GREBENKINA, G.F., kand. khim. nauk, red.; DZHARDAMALIYEVA,
K.K., kand. khim. nauk, red.; GLAZYRINA, D.M., red.;
ROROKINA, Z.P., tekhn.red.

[Catalytic reactions in the liquid phase] Kataliticheskie
reaktsii v zhidkoi faze; trudy Vsesoiuznoi konferentsii.
Alma-Ata, Izd-vo AN Kaz.SSR, 1963. 459 p. (MIRA 16:12)

1. Vsesoyuznaya konferentsiya po kataliticheskim reaktsiyam
v zhidkoy faze, Alma-Ata, 1962. 2. Kazakhskiy tekhnologicheskiy
institut i Institut khimicheskikh nauk AN KazSSR (for
Sokol'skiy).

(Catalysis)

ZAKARINA, N.A.; ZAKUMBAYEVA, G.D.; SOKOL'SKIY, D.V., akademik

Effect of zinc ions on the sorption of hydrogen and the
catalytic activity of palladium. Dokl. AN SSSR 153 no.1:
133-135 N '63. (MIRA 17:1)

1. Institut khimicheskikh nauk AN KazSSR. 2. AN KazSSR
(for Sokol'skiy).

ACCESSION NR: AP4041403

S/0020/64/156/006/1386/1388

AUTHOR: Zakumbayeva, G. D.; Noskova, N. F.; Konayev, E. N. Sokol'skiy, D. V. (Academician AN KazSSSR)

TITLE: Liquid phase oxidation of carbon monoxide

SOURCE: AN SSSR. Doklady*, v. 156, no. 6, 1964, 1386-1388

TOPIC TAGS: carbon monoxide, liquid phase oxidation, palladous chloride catalyst, cupric chloride catalyst, bromide ion, iodide catalyst, acetate ion, catalyst activity, catalyst regeneration, catalyst life

ABSTRACT: The liquid phase oxidation of low concentrations (0.3-2%) of carbon monoxide in a circulating system at 20, 40 and 60C was investigated. The CO-containing gas was bubbled at 150-300 liters/hour through the catalyst solution at the bottom of the reactor. At 20C only 12% oxidation was attained using PdCl_2 or CuCl_2 in 0.02-0.1N HCl; this yield was lowered to 6% at 40C. With the addition of bromide or iodide ion oxidation was increased to 20% and was independent of temperature. A maximum oxidation of 35% was attained with $[\text{Pd}^{2+}] : [\text{Cu}^{2+}] = 0.22$, $[\text{Cl}^-] : [\text{Br}^-] = 0.2$ and 0.02N HCl.

Card

1/2

SOV/153-2-3-6/29

5(2), 5(4), 5(3)

AUTHORS:

Zakumbayeva, G. D., Sokol'skiy, D. V.

TITLE:

The Effect of Potassium Iodide on the Catalytic Hydrogenation of Some Organic Compounds

PERIODICAL:

Izvestiya vysshikh uchebnykh zavedeniy. Khimiya i khimicheskaya tekhnologiya, 1959, Vol 2, Nr 3, pp 340-344 (USSR)

ABSTRACT:

At the beginning various results on investigations of the effect mentioned in the title are quoted (Refs 1-7). The following Soviet authors are mentioned: Aykazyan and Fedorova (Ref 4) and Pleskov (Ref 5). The hydrogenation process of various organic compounds was investigated on a skeleton nickel catalyst (0.3 g) with 20, 30, and 40° in 50 % ethyl alcohol. The solutions were 1N, 0.5N, 0.1N and 0.01 N of potassium iodide. The kinetic and potential curves of the hydrogenation were recorded, namely for the following substances: cyclohexene (Fig 1), allyl alcohol (Fig 2 and Table), mesityl oxide (Fig 3), and n-nitrophenol (Fig 4). The following was found: The iodide ion reduces the rate of hydrogenation of unsaturated compounds and displaces the potential of the catalyst to the negative values. The inhibiting effect of the iodide is stronger than

Card 1/2

The Effect of Potassium Iodide on the Catalytic Hydrogenation of Some Organic Compounds SOV/153-2-3-6/29

that of the bromide; it still increases with the increasing dipole moment of the hydrogenated substance. The rate of hydrogenation depends on the fact to what degree the substance to be hydrogenated may reach the surface of the catalyst. There are 4 figures, 1 table, and 11 references, 10 of which are Soviet.

ASSOCIATION: Institut khimicheskikh nauk AN KazSSR i Kazakhskiy gosudarstvennyy universitet imeni S. M. Kirova - Kafedra kataliza i tekhnicheskoy khimii (Institute of Chemical Sciences AS KazSSR and Kazakh State University imeni S. M. Kirov - Chair of Catalysis and Technical Chemistry)

SUBMITTED: March 14, 1958

Card 2/2

ZAKUMBAYEVA, G.D.; NOSKOVA, N.F.; KONAYEV, E.N.; SOKOL'SKIY, D.V., akademik

Liquid phase oxidation of carbon monoxide. Dokl. AN SSSR 156 no.6:
1386-1388 Je '64. (MIRA 17:8)

1. Akademiya nauk Kazakhskoy SSR (for Sokol'skiy).

ZAKUMBAYEVA, G.D.; ZAKARINA, N.A.; SOKOL'SKIY, D.V., akademik

Effect of rhodium and nickel salts on the sorptive and catalytic properties of palladium black. Dokl. AN SSSR 160 no.4:829-832
P 165. (MIRA 18:2)

1. Institut khimicheskikh nauk AN Kazakh. 2. AN KazSSR (for Sokol'skiy).

SOKOL'SKIY, D.V.; ZAKUMBAYEVA, G.D.

Reduction of *p*-nitrophenol on a nickel skeletal catalyst in the
presence of potassium chloride, bromide, and iodide. Trudy Inst.
khim.nauk AN Kazakh.SSR. 5:3-8 '59. (MIRA 13:6)
(Phenol) (Reduction)

ZAKUMAYEVA, G.D.; SOZOL'SKIY, D.V.

Effect of alkali metal halides on the rate of hydrogenation of
allyl alcohol. Trudy Inst.khim.nauk AN Kazakh.SSR 5:9-14 '59. .
(MIRA 13:6)

(Allyl Alcohol)
(Alkali metal halides)
(Hydrogenation)

SOKOL'SKIY, D.V.; ZAKUMRAYEVA, G.D.

Effect of alkali metal halides on the mechanism of hydrogenation of
cyclohexene on platinum black. Izv.AN Kazakh.SSR,Ser.khim. no.1:
62-64 '59. (MIRA 13:6)

(Alkali metal halides)

(Hydrogenation)

(Cyclohexene)

ZAKUMPAIEVA, G. D., Cam Chem Sci -- (russ) "The effect^{of} halides of
basic metals on the adsorption and catalytic properties of Ni, Pt and Pd,"
Alma-Ata, 1960, 19 pp, 250 cop (Kazakh State U in S. M. Kirov) (KL, 43-60, 117)

2. ALUMINUM, C. D.

P. 2

PHASE I BOOK EXPLOITATION

SOV/3537

Akademiya nauk Kazakhskoy SSR. Institut khimicheskikh nauk

Trudy, t. 5 (Transactions of the Institute of Chemical Sciences,
Kazakh SSR, Academy of Sciences, Vol 5) Alma-Ata, Izd-vo
Akademii nauk Kazakhskoy SSR, 1959. 154 p. 1,000 copies
printed.

Ed.: N.D. Zhukova; Tech. Ed.: Z.P. Rorokina; Editorial Board of
Series: D.V. Sokol'skiy (Resp. Ed.), V.G. Gutsalyuk, and
B.V. Suvorov (Resp. Secretary).

PURPOSE: This collection of articles is intended for personnel of
scientific research laboratories, laboratories of industrial
enterprises, and faculty members of schools of higher education.

COVERAGE: The collection reviews problems of liquid-phase catalytic
hydrogenation to upgrade and reactivate various products. Hydro-
genation of unsaturated bonds of various types, adsorption of
hydrogen on different catalysts, chromatographic separation of
mixtures, and the effect of halogen salts of alkali metals on
the rate of hydrogenation reactions promoted by various skeleton
catalysts are described. Conditions of catalytic hydrogenation

Card 1/5

Transactions of the Institute (Cont.)

SOV/3537

of natural fat, sunflower oil, and such synthetic products as esters of high-molecular fatty acids are set out. Dehydration of the butane fraction carried out in combination with isomerization is analyzed. Principles of selecting catalysts and regenerating them are reviewed and the formation of adsorption potentials on metal catalysts is explained. Each article presents conclusions drawn on the basis of experimental findings. References accompany most of the articles.

TABLE OF CONTENTS:

Sokol'skiy, D.V., and G.D. Zakumbayeva. Reduction of n-Nitrophenol Carried out Over the Skeleton Ni Catalyst in Presence of Potassium Chloride, Potassium Bromide, and Potassium Iodide	3
Zakumbayeva, G.D., and D.V. Sokol'skiy. Effect of Alkali Metal Halides on the Rate of Hydrogenation of Allyl Alcohol	9
Sokol'skiy, D.V., and N.M. Popova. Adsorption of Hydrogen on Ni/ZnO Catalysts	15
Card 2/5	

Transactions of the Institute (Cont.)

SOV/3537

Popova, N.M., and D.V. Sokol'skiy. Hydrogenation of Allyl Alcohol Over Ni/ZnO Catalysts	20
Shmonina, V.P., R.N. Khasanova, and D.V. Sokol'skiy. Chromatographic Separation of Mixtures of Nitrobenzene-Aniline Products	28
Golodova, L.S., and D.V. Sokol'skiy. Study of Hydrogenation Reactions of Natural Fats and Their Simplest Synthetic Analogues, the Esters of High-Molecular-Fatty Acids	36
Golodova, L.S., D.V. Sokol'skiy, and Ye.A. Pod'yacheva. Kinetics and Mechanism of Hydrogenation of Sunflower Oil in Solutions	44
Luk'yanov, A.T. Problem of Formation of Adsorption Potentials on Metal Catalysts	50
Yerzhanov, A.I., and D.V. Sokol'skiy. Potentiometric Study of Hydrogenation of Benzalacetone Over Skeleton Pd/Ni Catalysts	56
Buvalkina, L.A., G.V. Pavlova, Z.F. Prussakova, and D.V. Sokol'skiy. Dehydroisomerization of the Commercial Fraction of n-Butane Over Oxide Catalysts	64
Card 3/5	

Transactions of the Institute (Cont.)

SOV/3537

- Shmonina, V.P., K.M. Vlasova, and D.V. Sokol'skiy. Catalytic Reduction of Aromatic Nitro Compounds. Part IX 72
- Flid. R.M. [Moskovskiy institut tonkoy khimicheskoy tekhnologii imeni M.V. Lomonosova--Moscow Institute of Fine Chemical Technology imeni M.V. Lomonosov]. Some Principles of Selecting Catalysts for Liquid-Phase Hydration of Acetylene to Acetaldehyde 81
- Shcheglov, N.I., and D.V. Sokol'skiy. Some Methods of Reactivating the Skeleton Nickel Catalyst 92
- Shcheglov, N.I., and D.V. Sokol'skiy. Hydrogenation of Acetylene in the Liquid Phase 97
- Sokol'skiy, D.V., and L.P. Dunina. Hydrogenation of a Sodium Salt of Propiolic Acid Over Platinum 110
- Sokol'skaya, A.M., and D.V. Sokol'skiy. Hydrogenation of Cinnamic Alcohol (Styrone)
- Card 4/5

Transactions of the Institute (Cont.)

SOV/3537

. Fasman, A.B., and D.V. Sokol'skiy. Effect of the Amount of Catalyst on the Rate of Catalytic Hydrogenation

114

. Sokol'skiy, D.V. Hydrogenation in Solutions

146

AVAILABLE: Library of Congress

Card 5/5

TM/jb
5-25-60

ZAKUMBAYEVA, G.D. AND SOKOLSKY, D.V.

"Hydrogen adsorption and catalytic activity of platinum, nickel and palladium in the presence of anions and cations."

Report submitted to the Intl. Committee for Electrochemical thermodynamics and kinetics, Rome, Italy 24-29 Sep 1962

ZAKUMBAYEVA, G.D.; NOSKOVA, N.F.; KOLAYEV, E.N.; SOKOL'SKIY, D.V., akademik

Low-temperature oxidation of carbon monoxide by aqueous solutions
of palladium salts. Dokl. AN SSSR 159 no.6:1323-1325 D '64
(MIRA 18:1)

1. Institut khimicheskikh nauk AN KazSSR. 2. AN KazSSR (for
Sokol'skiy).

ZAKARINA, N.A.; ZAKUMBAYEVA, G.D.; SOKOL'SKIY, D.V., Akademik

Selective hydrogenation of dimethylacetylenecarbonyl on Pd black
in the presence of cadmium ions. Dokl. AN SSSR 162 no.4:774-776
Je '65. (MIRA 18:5)

1. Institut Khimicheskikh nauk AN KazSSR. 2. AN KazSSR (for
Sokol'skiy).

5(4)

AUTHORS:

Sokol'skiy, D. V., Academician, AS Kazakhskaya SSR,
Zakumbayeva, G. D.

SOV/20-124-4-42/67

TITLE:

The Influence of the Halides of Alkali Metals Upon the
Mechanism of the Catalytic Hydrogenation of Cyclohexene
(Vliyaniye galoidov shchelochnykh metallov na mekhanizm
kataliticheskogo gidrirovaniya tsiklogeksena)

PERIODICAL:

Doklady Akademii nauk SSSR, 1959, Vol 124, Nr 4, pp 380-382
(USSR)

ABSTRACT:

The influence exercised by salts on the catalytic hydrogenation of solutions has hitherto been only very little investigated. The authors investigated the hydrogenation of cyclohexene on a skeleton-nickel-catalyst (0.3 g) in solutions of 0.01; 0.1; 0.5 and 1 n KCl, KBr and KJ in 50% ethyl alcohol at the temperatures of 20, 30, 40°. For comparison, experiments were also carried out with 50%-ethyl alcohol without any additions. The authors investigated the kinetics of hydrogen absorption and determined the potential of the pulverulent catalyst. A diagram shows the kinetic curves and the potential curves for the hydrogenation of cyclohexene in the presence of KCl at 20°. The rate of hydro-

Card 1/3

SOV/20-124-4-42/67

The Influence of the Halides of Alkali Metals Upon the Mechanism of the Catalytic Hydrogenation of Cyclohexene

generation decreases with increasing concentration of the KCl. Additions of KCl shift the potential of the catalyst towards the negative side. With increasing concentration, the rate of hydrogenation of the KCl decreases. The second diagram shows the kinetic curves and the potential curves for the hydrogenation of cyclohexene in the presence of KBr. The influence exercised by KCl and KBr is nearly the same in both cases, a certain difference becoming noticeable only in the case of the potential curves. The hydrogenation of cyclohexene in the presence of additions of KCl and KBr takes place at more negative potentials, and the rate of hydrogenation decreases accordingly. This is apparently due to the decreases of the adsorption of cyclohexene on the catalytic surface in the presence of additions. The activation energy of the hydrogenation of cyclohexene grows with increasing concentration of the admixtures from 2 to 6 kcal/mol. Additions of KJ reduce the rate of hydrogenation of cyclohexene still more. For the potential of the catalyst it holds that $\text{Cl}^- < \text{Br}^- < \text{J}^-$. The pH-value of the substances investigated was somewhat modified after the experiments. A

Card 2/3

SOY/20-124-4-42/67

The Influence of the Halides of Alkali Metals Upon the Mechanism of the Catalytic Hydrogenation of Cyclohexene

potassium-cation is adsorbed in a KCl solution on the surface of the nickel catalyst, but in solutions of KBr and KJ an anion is adsorbed. For the binding energy of the adsorbed hydrogen it holds that $Cl^- < Br^- < J^-$. There are 3 figures, 1 table, and 6 references, 3 of which are Soviet.

ASSOCIATION: Institut khimicheskikh nauk Akademii nauk KazSSR
(Institute of Chemical Sciences of the Academy of Sciences,
Kazakhskaya SSR)

SUBMITTED: August 25, 1958

Card 3/3

66873

SOV/76-33-11-36/47

5.3200
5.1190

5(4)
AUTHORS:

Sokol'skiy, D. V., Zakumbayeva, G. D.

TITLE:

The Influence of Potassium Bromide Additions on the Mechanism of the Catalytic Hydrogenation of Some Organic Compounds

PERIODICAL:

Zhurnal fizicheskoy khimii, 1959, Vol 33, Nr 11, pp 2579-2585 (USSR)

ABSTRACT:

The influence of neutral electrolytes on the mechanism of catalytic hydrogenation has hitherto scarcely been investigated. Only recently Erdey-Gruz and Tsimmer (Ref 1), and Khosino and Miyata (Ref 2) carried out such investigations. The potentiometric method developed by D. V. Sokol'skiy and V. A. Druz' (Ref 3) makes possible to investigate the influence of the above-mentioned additions on the structure of the double-layer and on the concentration relation of the reacting substances on the surface of the pulverized catalysts. Additions of potassium bromide were investigated in the present case, since studies of A. N. Frumkin (Ref 4) showed that the bromine anion influences the reduction on the Pt - H₂ electrodes. The experiments were made on a skeleton nickel catalyst (0.3 g),

Card 1/3

66873

SOV/76-33-11-36/47

The Influence of Potassium Bromide Additions on the Mechanism of the Catalytic Hydrogenation of Some Organic Compounds

cyclohexene, allyl alcohol, mesityl oxide, and p-nitrophenol being hydrogenated. 50%-ethanol and 0.01, 0.1, 0.5, and 1% solutions of KBr in 50% ethanol at 20, 30, and 40° were used. The kinetic and potential curves obtained (Fig 1) show that with an increase in the concentration of the potassium bromide the adsorption of the cyclohexene on the surface of the catalyst decreases as well as the rate of hydrogenation. It is assumed that the bromine anion forms a film on the surface of the catalyst by which an additional potential barrier is formed which prevents the cyclohexene from entering into the reaction. Calculations of the activation energy (Table 1) show that the limiting stage of the cyclohexene hydrogenation on the skeleton nickel represents the activation of the cyclohexene, and that this activation is increased by the addition of KBr. The influence of additions of potassium bromide on the hydrogenation of allyl alcohol (Figs 2,3) is weaker than at cyclohexene, while with p-nitrophenol (Fig 5) the effect observed is similar to that with cyclohexene. The hydrogenation of mesityl oxide is accelerated by small additions of potassium bromide (0.01

Card 2/3

66873

SOV/76-33-11-36/47

The Influence of Potassium Bromide Additions on the Mechanism of the Catalytic Hydrogenation of Some Organic Compounds

and 0.1n) (Fig 4), but inhibited by higher concentrations (0.5 and 1n), which fact is explained by an orientation of the dipoles. It is assumed that the more negative the dipole momentum of the substance is the worse is the hydrogenation in the presence of bromine ions. The hydrogenation of the mesityl oxide is also limited by the activation of the mesityl oxide (Table 2, activation energies). With respect to the amount of the adsorption the compounds investigated can be listed in the following order: cyclohexene < allyl alcohol < mesityl oxide < p-nitrophenol. There are 5 figures, 2 tables, and 8 Soviet references. 4

ASSOCIATION: Akademiya nauk KazSSR (Academy of Sciences of the KazSSR)

Card 3/3

ZAKUMBAYEVA, G.D.

Effect of the structure of a double layer on the adsorptive and
catalytic properties of nickel and platinum. Trudy Inst.khim.
nauk AN Kazakh.SSR 8:73-80 '62. (MIRA 15:12)
(Nickel catalysts) (Platinum catalysts) (Adsorption)

L 25157-65 ENT(m)/ENP(j)/ENP(t)/ENP(h) IJP(c) JD/JG/RM
 ACCESSION NR: AP5001991 S/0020/64/159/006/1323/1325

AUTHOR: Zakumbayeva, G. D.; Noskova, N. F.; Sokol'skiy, D. V.; Konayev, E. N. (Academician AN KazSSR)

TITLE: Low temperature oxidation of carbon monoxide with aqueous solutions of palladium salts

SOURCE: AN SSSR. Doklady, v. 159, no. 6, 1964, 1323-1325

TOPIC TAGS: carbon monoxide oxidation, palladium containing catalyst, palladium copper iron catalyst, catalyst stability

ABSTRACT: Small amounts of CO (0.2-4%) can be essentially completely oxidized in one pass at low temperatures with aqueous solutions of a catalyst system containing Pd^{2+} - Cu^{2+} - Fe^{3+} . The oxidation proceeds via the formation and decomposition of the π complex $[\text{PdX}_3\text{CO}]^-$; the reduced Pd must be regenerated to Pd^{2+} . H_2O_2 , CrCl_3 , $\text{K}_2\text{Cr}_2\text{O}_7$, Cu^{2+} and Fe^{3+} were investigated as oxidizing agents in the aqueous Pd salt solutions; the most stable and active system contained $[\text{Pd}^{2+}]/[\text{Cu}^{2+}] = 0.22$; 0.5-1 g/l Fe^{3+} increased the activity, but 1.5-2.5

Card 1/2

L 25137-65

ACCESSION NR: AP5001991

g/l of Fe^{3+} retarded the CO oxidation process. Anion concentration also affected the process; optimum catalyst activity was attained with 3.5 g/l Cl^- , 20.6 g/l Br^- and 13-15 g/l CH_3COO^- . Increasing temperature from 20 to 40 C had little effect, and the gas feed rate had no effect on the catalyst activity. Complete reversibility of the $\text{Cu}^{2+} \rightleftharpoons \text{Cu}^+ + e$ redox system is necessary to maintain high catalytic activity. Several methods for possibly increasing catalyst stability were investigated. $\text{K}_2\text{Cr}_2\text{O}_7$ and CrCl_3 did not give desired results; high concentrations of oxidizing agents with high redox potentials (Fe^{3+}) interfered with reduction of the Pd complex. Catalyst stability was prolonged by the constant addition of 0.4% H_2O_2 , but after several hours the activity fell due to the dilution of the catalyst solution. The stability of the catalyst was increased by a new method of regeneration (Abstractor's note: the method was not described) so the process could be operated continuously as long as desired. Orig. art. has: 3 figures.

ASSOCIATION: Institut khimicheskikh nauk Akademii nauk KazSSR (Institute of Chemical Sciences, Academy of Sciences, KazSSR)

SUBMITTED: 17 Aug 64

ENCL 00

SUB CODE: GC

NR REF SOV: 005

OTHER: 005

Card. 2/2

ZAKUMKIN, S.N.

Statistical generalized moment of V.K. Semenchenko, and the
surface activity of metals. Zhur. neorg. khim. 5 no.8:1892-1893
Ag '60. (MIRA 13:9)

1. Kabardino-Balkarskiy gosudarstvennyy universitet.
(Metals) (Ions)

ZAKUPRA, V.A., Cand Tech Sci -- (diss) "Study of the wide
neutral^{resin} ^{the} fraction of ^{the} ^{single} semi-coke/brown coal of the Aleksandriyck
deposit of the UKSSR and products of its catalytic processing."
Dnepropetrovsk, 1959. 14 pp; 1 sheet of tables (Fin of Higher
Education UKSSR. Dnepropetrovsk Chem-Tech~~ical~~ Inst im P.E. Dzer-
zhinskiy). 150 copies (PL, 38-58, 116)

35

L 19865-65 EWT(m)/EPF(c)/EWP(j) Pc-4/Pr-4 AEDC(b)/SSD/ESD/AFWL/APCC(b)/ESD(ss)/
ESD(t) RM/MLK 26 S/
ACCESSION NR AM5001004 BOOK EXPLOITATION B

Sklyar, Vladimir Tikhonovich (Candidate of Chemical Sciences); Lebedev,
Yevgraf Venediktovich (Candidate of Chemical Sciences); Zakupra, Vadim
Aleksandrovich (Candidate of Technical Sciences)

Higher monoolefins (Vy'shiye monoolefiny*), Kiev, Izd-vo "Tekhnika", 1964,
281 p. illus., biblio. 1,800 copies printed.

TOPIC TAGS: higher monoolefin, chromatography, infrared spectroscopy, mass spectroscopy

PURPOSE AND COVERAGE: This book covers the problems of obtaining monoolefins with five and more carbon atoms and their use for alcohol synthesis, washing substances, plastics plasticizers, synthetic resins, oil additives, high quality special lubricants, etc. The methods of studying olefin-containing carbon mixtures, especially the methods of gas-liquid and liquid chromatography, infrared spectroscopy, mass spectroscopy, etc. are examined in detail. The book is intended for researchers, engineers, and technicians in the petrochemical and oil refining industries and can also be useful for students and graduate students specializing in petrochemical synthesis.

TABLE OF CONTENTS [abridged]:

Card 1/2

L 19065-65

ACCESSION NR AM5001004

Foreword -- 3

Ch. I. Obtaining higher monoolefins of hydrocarbons -- 5

Ch. II. Investigation of higher monoolefins -- 65

Ch. III. Use of higher monoolefins -- 140

Appendix -- 255

Bibliography -- 263

SUB CODE:OC

SUBMITTED: 14Apr64

NR REF SOV: 245

OTHER: 272

DATE ACQ: 30Nov64

Card 2/2

1 41165-55 EWT(m)/EWP(t)/EWP(b) IJF(c) JD

S/0286/65/000/003/0041/0041

ACCESSION NR: AP5007171

AUTHOR: Lebedev, Ye. V.; Sklyar, V. T.; Perekrest, A. N.; Gordash, Yu. T.;
Zakupra, V. A.; Kal'chenko, V. M.; Gyul'misarvan, T. G.

TITLE: A method for producing highly aromatized material for making carbon black.
Class 23, No. 167933

SOURCE: Byulleten' izobreteniy i tovarnykh znakov, no. 3, 1965, 41

TOPIC TAGS: carbon black, aromatic compound

ABSTRACT: This Author's Certificate introduces a method for producing highly aromatized material for the production of carbon black. The material is made from petroleum byproducts by using redistillation to isolate the hydrocarbon fraction which contains the aromatic compounds. This fraction is then extracted by furfural or phenol. In order to provide a wider choice of materials, coke distillate is used as the petroleum byproduct. The 240-460°C fraction is isolated from the distillate.

ASSOCIATION: none

Card 1/2 /

ZAKUPRA, V.A.; LEBEDEV, Ye.V.; MANZA, I.A.

Chromatographic analysis of the cracking and dehydrogenation products
of paraffin hydrocarbons. Khim. i tekhn. topl. i masel 10 no.2:28-34
F '65. (MIRA 18:8)

1. UkrNIIGIPRONEFT'.

DAL', V.I.; ZAKUPRA, V.A.; RUBAN, I.N.

~~Determining~~ sulfur in coal products by the method of double
combustion. Zav. lab. 24 no.12:1445-1446 '58. (MIRA 12:1)

1.Dnepropetrovskiy khimiko-tekhnologicheskii institut.
(Sulfur--Analysis)

11(4)

SCV/156-55-1-45/54

AUTHORS:

Dal', V. I., Zakupra, V. A.

TITLE:

The Chromatographic Investigation of the Benzene From the Catalytic Cracking of the Neutral Tar Share of the Smelting of the Aleksandriya Lignite of the UkrSSR (Khromatograficheskoye issledovaniye benzina kataliticheskogo krekinga neytral'noy chasti smoly polukoksovaniya aleksandriyskikh burykh ugley USSR)

PERIODICAL:

Nauchnyye doklady vysshey shkoly. Khimiya i khimicheskaya tekhnologiya, 1959, Nr 1, pp 173 - 176 (USSR)

ABSTRACT:

The complete chromatographic separation of hydrocarbons necessitates the use of rather complicated high columns. A U-shaped column is proposed, in which the substance to be chromatographed moves downward in the first half, and upward in the second (Figure). The cracking product obtained on the metal reactor at 450° yielded 30.5% benzene (boiling point below 200°), 38.2% gas oil (boiling point above 200°), and 10.5% gas. The remaining 20.8% is made up of coke, moisture, and losses. Benzene was fractionated on silica gel ASM. Physical data and iodine number were determined in respect of the

Card 1/2

The Chromatographic Investigation of the Benzene From the SC7/156-59-1-45/54
Catalytic Cracking of the Neutral Tar Share of the Semi-coking of the
Aleksandriya Lignite of the UkrSSR

Individual fractions (Table). The chromatograms presented show the separation into paraffin- and naphthene-hydrocarbons, clefines and aromatic hydrocarbons. The physical constants change accordingly. One table shows the compositions of the individual fractions from these hydrocarbon groups. A striking fact is the high aromatic hydrocarbon content (heavy benzol, xylenes). There are 3 figures, 2 tables, and 9 references, 8 of which are Soviet.

ASSOCIATION:

Kafedra khimicheskoy tekhnologii topliva Dnepropetrovskogo
khimiko-tekhnologicheskogo instituta im. F. E. Dzerzhinskogo
(Chair of Chemical Technology of Fuels of the Dnepropetrovsk
Institute of Chemical Technology imeni F. E. Dzerzhinskiy)

SUBMITTED:

June 20, 1958

Card 2/2

DAL', V.I., doktor tekhn. nauk; ZAKUPRA, V.A., inzh.

Investigation of the composition of the tar of semicoked
Aleksandrov brown coal and products of its catalytic cracking.
Kompl. vyk. pal.-energ. res. Ukr. no.1:209-221 '59.
(MIRA 16:7)

1. Dnepropetrovskiy khimiko-tekhnologicheskii institut im.
Dzerzhinskogo.
(Coal tar) (Coal-Carbonization)

SKLYAd, Vladimir Tikhonovich, kand. khim. nauk; LEBEDEV, Yevgraf
Verediktovich, kand. khim. nauk; ZAKUPRA, Vadim
Aleksandrovich, kand. tekhn. nauk; KLEBENKO, A.P., kand.
tekhn. nauk, retsenzent

[Higher monoclefins] Vysshie monoclefiny. Kyiv, Tekhnika,
1964. 281 p. (MIRA 17:9)

KLIMENKO, Aleksandr Petrovich, kand. tekhn. nauk; ZAKUPRA, V.A.,
kand. khim. nauk, retsenzent

[Separation of natural hydrocarbon gases] Razdelenie pri-
rodnykh uglevodorodnykh gazov. Kiev, Tekhnika, 1964. 379 p.
(MIRA 17:11)

ACCESSION NR: AP4043279

S/0065/64/000/008/0021/0026

AUTHOR: Zakupra, V. A.; Lebedev, Ye. V.; Manza, I. A.

TITLE: The effect of chemical treatment on the structure and adsorption property of silica gels with different trade marks

SOURCE: Khimiya i tekhnologiya topliv i masel, no. 8, 1964, 21-26

TOPIC TAGS: silica gel, industrial silica gel, silica gel separation effectiveness, displacement chromatography, silica gel chemical treatment, hydrocarbon group separation, chromatographic hydrocarbon analysis

ABSTRACT: The effect of chemical treatment (with HCl and H₂O₂) of industrial silica gels ASM, KSM, ASK, and of silica gels with a given pore radius KSM-6, KSS-4, KSK-2, on the effectiveness of their separation of various synthetic mixtures of paraffinic, mono-olefinic, and aromatic hydrocarbons was studied by means of displacement chromatography. The use of displacement chromatography for analytical determination of the group composition of cracking or dehydrogenation products has made it possible to decrease the total volume of the

Card 1/5

ACCESSION NR: AP4043279

mixture to be studied as a result of a decrease in the volume of the desorption fraction used in identification. Thus, a decrease in the volume of the mixture to be analyzed decreases the consumption of silica gels. It is noted that this method is advantageous for a series of determinations, since the size of the apparatus dimensions and the time needed for analysis are also decreased. The characteristics of the individual hydrocarbon fractions separated are given in Table 1 of the Enclosure. To determine the effect of chemical treatment of silica gels on the effectiveness of separation of various hydrocarbon mixtures, silica gels with various porous structure (treated and untreated chemically) were used. It was found that the best properties for separating benzene, n-heptane and 2-heptene (mixture 1), and isopropyl benzene, n-octane, and 1-octene (mixture 2) were possessed by ASM, KSM, and KSS-4 silica gels which had been treated chemically. For separation of α -methylnaphthalene, n-hexadecane, and 1-hexadecene (mixture 3), the most effective agents were KSS-4 and ASK silica gels which also had been chemically treated. KSM-6 silica gel clearly showed the effect of chemical treatment, and its separation effectiveness for mixtures of 1 and 2 approached that of

Card

2/5

ACCESSION NR: AP4043279

ASH, KSH, and KSS-4. The activity determination of the silica gels used in the separation of benzene showed a decrease of 4 to 5 units for fine, porous silica gels which had been chemically treated. This decrease in activity is explained by a decrease in the specific surface on which the process of absorption of benzene depends. A sharper decrease in the specific surface (from 590 to 470 m²/g) as a result of chemical treatment occurred in ASH silica gel. From the differential curve of the distribution of pore sizes or the effective radii of the silica gels used, it was concluded that the effective pore radius of chemically treated KSS-4 silica gel is 21 to 27 Å greater than that of the untreated gel. For ASH silica gel with a larger pore size, the change is characterized by an increase in the number of large pores. It was concluded that the separating ability of silica gels increases after chemical treatment, with the exception of KSK-2 silica gel, which consists of large pores and has decreased ability to separate mixtures of high-molecular particles. The most effective silica gel with medium pore size was KSS-4. Thus, it was established that chemical treatment leads to changes in the porous structure of silica gels by increasing the pore size and decreasing the specific surfaces. Orig. art. has: 5 figures and 2 tables.

Card 3/5

ACCESSION NR: AP4043279

ASSOCIATION: UkrNIigiproneft'

SUBMITTED: 00

ATD PRESS: 3080

ENCL: 01

SUB CODE: MT, GC

NO REF SOV: 007

OTHER: 003

Card

4/5

ACCESSION NR: AP4043279

ENCLOSURE: 01

Table 1. Characteristics of individual starting hydrocarbons

Compound	Boiling Point °C* (760 mm of Hg)	Refractive Index n _D	Density	Synthetic Mixture of Hydrocarbons % by volume
Benzene	80.0—80.5	1.5010	0.8790	33.5
n-Heptane	97.5—97.9	1.3875	0.6833	33.2
2-Heptane	imported, not distilled	1.4094	0.7108	33.3
Isopropyl benzene	149.9—151.7	1.4908	0.8635	33.4
n-Octane	124.3—125.0	1.3972	0.7027	33.3
1-Octene	imported, not distilled	1.4089	0.7150	33.3
α-Methylnapthalene	68.9—70.3 (4 mm pm. cm.)	1.6148	1.0232	37.7
n-Hexadecane	108.3—108.5 (3.5 mm pm. cm.)	1.4345	0.7740	31.3
1-Hexadecene	imported, not distilled	1.4412	0.7811	31.0

*Individual hydrocarbons were distilled in a fractionation column with an effectiveness of 20—22 theoretical plates

5/5

Card

SKLYAR, V.T.; LEBEDEV, Ye.V.; ZAKUPRA, V.A.

Dehydrocracking of paraffins over sulfide catalysts. Nefte-
khimiia 4 no.2:200-208 Mr-Apr'64 (MIRA 17:8)

Thermocatalytic conversion of paraffins over oxide catalysts.
Ibid.:209-214

1. Gosudarstvennyy nauchno-issledovatel'skiy i proyektnyy insti-
tut neftyanoy i neftechimicheskoy promyshlennosti "Ukrniigiproneft",
Kiyev.

ACCESSION NR: AP4032515

S/0204/64/004/002/0209/0214

AUTHOR: Sklyar, V. T.; Lebedev, Ye. V.; Zakupra, V. A.

TITLE: Thermocatalytic transformation of paraffins on oxide catalysts

SOURCE: Neftekhimiya, v. 4, no. 2, 1964, 209-214

TOPIC TAGS: paraffin dehydrocracking, olefin production, α olefin production, thermocatalytic cracking, oxide catalyst, MoO sub 3 NiO Al sub 2 O sub 3 catalyst, WO sub 3 NiO Al sub 2 O sub 3 catalyst, Cr sub 2 O sub 3 /Fe sub 2 O sub 3 catalyst, isomerization, disproportionation, aromatization, condensation, catalyst regeneration, economics, conversion rate

ABSTRACT: Liquid olefins were obtained in 35-45% yield from paraffins by dehydrocracking with oxide catalysts ($\text{MoO}_3\text{-NiO-Al}_2\text{O}_3$, $\text{WO}_3\text{-NiO-Al}_2\text{O}_3$, $\text{Cr}_2\text{O}_3/\text{Fe}_2\text{O}_3$) at temperatures of 550-590C. The paraffin crude, obtained from diesel oil by complexing with carbamide, typically contained 0.06% aromatics, and 40 wt.% C_{16} - C_{18} n-paraffins. At 550C increasing the feed rate reduced the yield; at 590C, the reverse obtains and high yields were obtained at a space velocity of 3 hours⁻¹. To obtain a relatively high α -olefin-containing product the conversion should be

Card 1/2

ACCESSION NR: AP4032515

limited to 30-40% at high temperatures and space velocities, simultaneously recirculating the unconverted portion of the crude and inert diluents. Side reactions such as isomerization, disproportionation of hydrogen, aromatization and condensation are more prevalent with these oxide than with sulfide catalysts. However, the former are cheaper and may be regenerated more easily. Orig. art. has: 1 table and 4 figures.

ASSOCIATION: Gosudarstvennyy nauchno-issledovatel'skiy i proyektnyy institut neftyanoy i neftekhimicheskoy promyshlennosti "Ukrniigiproneft" g. Kiyev.
(State Scientific Research and Planning Institute of the Petroleum and Petrochemical Industry)

SUBMITTED: 24Apr63

ENCL: 00

SUB CODE: FP, OC

NO REF SOV: 002

OTHER: 000

Card 2/2

5(2)

SOV/52-24-12-11/15

AUTHORS:

Dal', V. I., Zakupra, V. A., Ruban, I. N.

TITLE:

Determination of Sulfur in Products of Carbon Treatment Using the Double Combustion Method (Opredeleniye sery v produktakh pererabotki uglya metodom dvoynogo sozhzheniya)

PERIODICAL:

Zavodskaya Laboratoriya, 1958, Vol 24, Nr 12, pp 1445-1446 (USSR)

ABSTRACT:

The method of double combustion was suggested by Volynskiy and Chudakova (Ref 1). In the work reported here an iodine solution containing starch was used instead of the soda solution for adsorbing the SO_2 gas. The absorber was also modified (Figure), and among other changes the glass filter was replaced by a perforated plastic lamella. Instead of the gas burner a small electric furnace was used. The product of a catalytic cracking (over 200°), the neutral resinous fraction of semicoking ($200-350^\circ$), a cracking fraction ($200-300^\circ$), a Diesel oil, the resinous fraction of a catalytic cracking product (over 200°), concentrates of various aromatic hydrocarbons, and a coal tar were analyzed (Table). It was observed that with a sulfur con-

Card 1/2

SOV/32-24-12-11/40

Determination of Sulfur in Products of Carbon Treatment Using the Double Combustion Method

tent of more than 3% the titration of the SO_2 with iodine is more difficult. When this is the case the weighed sample taken must be smaller and the duration of the analysis must be lengthened. Using the iodine solution the analytic method is simplified and the analysis is carried out more quickly. There are 1 figure, 1 table, and 1 Soviet reference.

ASSOCIATION: Dnepropetrovskiy khimiko-tehnologicheskii institut
(Dnepropetrovsk Chemical-Technological Institute)

Card 2/2

ZAKUPRA, V.A., kand.tekhn.nauk

Apparatus for rapid chromatographic adsorption fractionation; two-stage chromatographic column. Nauch.zap.Ukrniiproekta no.4:141-149 '61. (MIRA 15:1)

(Chromatographic analysis) (Coal--Analysis)
(Petroleum--Analysis)

ZAKUPRA, V.A.; LEBEDEV, Ye.V.; MANZA, I.A.; Prinimala uc. astiye SIINYAKOVA,
T.B:

Effect of chemical treatment on the structure and adsorption
properties of various brands of silica gels. Khim. i tekh.
topl i masel 9 no.8:21-26 Ag '64. (MIRA 17:10)

1. UkrNIIGiproneft'.

L 62095-65 ENT(1)/EEC-4/ENA(R) Im-4/Pac-4/Feb/Pi-4/Pj-4

ACCESSION NR: AP5016729

UR/0286/65/000/010/0045/0045²³⁶

AUTHORS: Golont, L. Ye.; Tumakova, R. N.; Gabyshev, V. G.; Zakurdayev, A. D. ¹³

TITLE: Device for coupling a drift resonator with magnified spatial interaction and a rectangular waveguide. Class 21, No. 171033

SOURCE: Byulleten' izobreteniy i tevarnykh znakov, no. 10, 1965, 45

TOPIC TAGS: waveguide coupler, resonator

ABSTRACT: This Author Certificate presents a device for coupling a drift resonator with magnified spatial interaction and a rectangular waveguide through a coupling window in the resonator wall. To insure the required amount of coupling, the device is in the form of a triangular metallic plate (see Fig. 1 on the Enclosure). Its wide side is connected to the wide wall of the rectangular waveguide, and the apex is connected to the delay system of the drift resonator. A rectangular groove is cut in the wide wall of the waveguide under the plate coupler.

Orig. art. has: 1 diagram.

ASSOCIATION: Gosudarstvennyy komitet po elektronnoy tekhnike SSSR (State Committee for Electronic Technology, SSSR)

SUBMITTED: 18Apr64

ENCL: 01

SUB CODE: EC

NO REF SOV: 000

OTHER: 000

Card 1/2

L 62095-65

ACCESSION NR: AP5016729

ENCLOSURE: 01

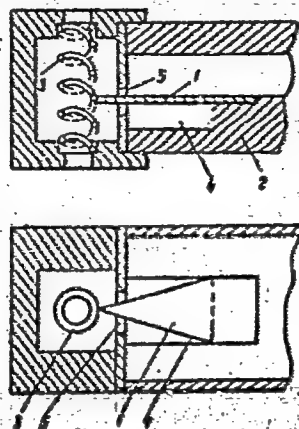


Fig. 1.

1- triangular metallic plate; 2- wide wall of waveguide; 3- delay system; 4- groove; 5- window

Card 2/2

LOMTATIDZE, G.A.; VEDERNIKOV, A.A.; Prinimali uchastiye: SHARONOV, G.V.s.g
inst.; ZAKURDAYEV, A.G.; MOKROVA, V.P.; ROZHKOV, I.M.

Carbon oxidation during the finishing period of the oxygen blowing
of an open-hearth furnace bath. [Sbor. trud.] TSNIICHM no.29:
b5.72 '63. (MIRA 17:4)

AKINFIYEV, V.I.; ZAKURDAYEV, A.G.; SHARONOV, G.Ye.; SOROKIN, A.A.;
CHEVELA, L.A.

Mechanism and the kinetics of processes taking place in the bath
of a basic open-hearth furnace in scrap and hot metal practice.
[Sbor. trud.] TSNIICHM no.29:73-102 '63. (MIRA 17:4)

1. TSentral'nyy nauchno-issledovatel'skiy institut chernoy metallurgii
(for Akinfiyev, Zakurdayev, Sharonov). 2. Dneprovskiy
metallurgicheskiy zavod imeni Dzerzhinskogo (for Sorokin, Chevela).

ROZHKOV, I.M.; ZAKURDAYEV, A.G.

Determining the moment of the charge melting, the carbon content at the time of melting, and the metal temperature. Izv. vys. ucheb. zav.; chern. met. 6 no.11:42-46 '63. (MIRA 17:3)

1. Tsentral'nyy nauchno-issledovatel'skiy institut chernoy metallurgii.

GEKITER, L.A.; ZAKURDAYEV, A.K.

Design of inductive pickups and measuring networks for them.
Vop. gidr. no. 12:84-111 '63. (MIRA 17:5)

L 05901-67 EWP(j)/EWT(m) IJF(c) RM

ACC NR: AT6016343 (A)

SOURCE CODE: UR/3183/65/000/001/0115/0120

AUTHOR: Birulya, A. K. (Doctor of technical sciences); Mikhovich, S. I. (Candidate of technical sciences); Zakurdayev, I. Ye. (Engineer)

ORG: None

TITLE: Automobile tire-to-road adhesion during the fall-winter period

SOURCE: Kharkov. Avtomobil'no-dorozhnyy institut. Avtomobil'nyy transport; mezhvedomstvennyy respublikanskiy nauchno-tekhnicheskiy sbornik, NO. 1, 1965, 115-120

TOPIC TAGS: automobile industry, road, highway vehicle data, motor vehicle, adhesion

ABSTRACT: Automobile tire adhesion to road surface is characterized by an adhesion factor which has a significant effect on safe maximum automobile speed and determines the economic efficiency of vehicle transport. The adhesion factor is a function of surface type and degree of roughness, wear and condition. This factor is not constant for any period of time but varies from season to season and year to year depending on climatic conditions. It is highest during summer months and falls sharply in winter. The most dangerous period for travelling is fall and winter. The adhesion factor drops from summer to winter from 0.75 to 0.40. The minimum values for this factor have been determined for many regions of the SSSR and run from 0.4 to 0.6. The authors discuss a method developed at the Kharkov Automobile Highway Institute for de-

Card 1/2

L 05901-67

ACC NR: AT6016343

termining the adhesion factor. This method is based on braking distance measurements. An expression is given for calculating the longitudinal adhesion factor using this method. Experimental verification of the theoretical data was done on the KhADI Mobile Laboratory based on the GAZ-51 truck, using the M-20 automobile as the test vehicle. The results show that the adhesion factor is highest (0.8-0.9) in warm weather for a dry asphalt surface and decreases to 0.45-0.55 for wet or dirty surfaces. During winter months the adhesion factor is 0.20-0.25 for snow and 0.14-0.18 for ice. All of these data are for the same road section. The effect of air temperature on the adhesion factor is considered. The authors recommend that since the minimum safe adhesion factor is 0.4, the road service crews should systematically measure the existing factors for various roads and develop effective means for maintaining a factor which ensures safe travel. Orig. art. has: 2 tables, 3 formulas.

SUB CODE: 13/ SUBM DATE: None/ ORIG REF: 004

05/

kh

Card 2/2

ZAKURDAYEV, Leonid Vasil'yevich; BOGATOVA, V.S., red.

[Motion-picture films, their characteristics and processing] Kinoplenki, ikh kharakteristiki i obrabotka. Moskva, Izd-vo "Iskusstvo," 1964. 109 p. (MIRA 17:7)

ZAKURDAYEV, M.

Patriotism and perseverance of Soviet seamen. Blok.agit.vod.
transp. no.16:11-18 Ag '55. (MIRA 8:9)

1. Sekretar' partiynoy organizatsii tankera "Tuapse"
(Formosa--Freedom of the seas)

ZAKURDAYEV, P.D.

Recovering oil from waste. P. Zakharov, Maslo-
boiaia Zhirovnaia Dzia 1935, 135.—The Salpin oil-extr. proc-
ess can be applied to cedar-nut oil, but only with the aid
of special app. The yield is increased several % by pur-
ifying the waste for oil recovery. Julian F. Smith

ASB.SLA METALLURGICAL LITERATURE CLASSIFICATION

ZAKURDAYEV, P. D. I MRYKHIN, N. I.

30370

Opyt raboty na nyetryeryvno dyeystvuyushchey austraktsionnoy
ustanovkyye s odnokratnym pryedvarit ye l'nym s'yemom masla.
Pishch. Prom-st' SSSR, Vyp. 13, 1949, S. 27-31.

SO: Letopis' No. 34

ZAKURDAYEV, P.D.

Processing undecorticated cottonseed in a worm-type extraction unit.
Masl.-zhir.prom. 17 no.10:13-15 '52. (MLRA 10:9)

1. Kropotkinskiy masloekstraktsionnyy zavod.
(Cottonseed)

ZAKURDAYEV, P.D.

Standard oilseed storage. Masl.-zhir. prom. 23 no.3:9-10 '57.
(MLRA 10:4)

1. Kropotkinskiy masloekstraktsionnyy zavod.
(Oilseeds--Storage)

ZAKURDAYEV, P.D.

Use of chain grates. Masl.-shir. prom. 23 no.5:31-32 '57. (MLRA 10:5)

1. Kropotkinskiy masloekstraktsionnyy zavod.
(Furnaces--Grates)

ZAKURDAYEV, P.D.

Certain features of the storage of the raw sunflower seed oil.
Masl.-zhir.prom. 28 no.2:38-39 F '62. (MIRA 15:5)

1. Kropotkinskiy masloekstraktsionnyy zavod.
(Sunflower seed oil)

ZAKURDAYEV, V., inzh.

Testing of the KDP-4,0 mowing machine at high speeds. Trakt. i sel'-
khoz mash.32 no.7:21-22 J1 '62. (MIRA 15:7)

1. Kazakhskaya mashinoispytatel'naya stantsiya.
(Mowing machines--Testing)

AUTHOR
TITLE

PERIODICAL
ABSTRACT

ASSOC
PRESE
SUBMIT
AVAILA

CARD 1/2

CARD 2

PA - 2476
by A.P. Zakurdayeva
Exhibition of Foreign Scientific and Technical Publications
(Vystavka ihostranny nauchnoy i nauchno-tekhnicheskoy literatury,
Russian)
Vestnik Akademii Nauk SSSR 1957, Vol. 27, No. 1, p. 101 (USSR)
Received: 2 May 1957 Reviewed: 4 June 1957
During the months of October and November 1956 the Academy of
Sciences of the USSR organized an exhibition of foreign scientific
and technical publications. This exhibition had been proposed by
the British booksellers Collets Holdings Ltd. which exhibited
books by 124 different British and American publishers. The
exhibition showed books in English on physics, mathematics,
astronomy, chemistry, biology, medicine, geology, geography,
different branches of technology - electronics, aviation,
metallurgy, energetics, transport, etc. - as well as on different
topics from the fields of history, economics, and art. Different
reference works, particularly from the field of technology,
received particularly favorable comments. The exhibition was
first shown in the House of Sciences in Moscow from 10 to 28
October, and then transferred to the House of Sciences in
Leningrad. The exhibition was visited by over 15,000 scientists

ZAKURDAYEV, N.I.; PITEOVA, A.A.; BRONSHVAGER, V.S.; BRIDGE, D.K.

Apparatus for studying the scattering of light in polymer solutions. Sov. Lab. 30 no.11:1407-1408 '64 (MIRA 18:1)

1. Moskovskiy gosudarstvennyy universitet Im. M.V.Lomonosova.

ZAKURDAYEVA, N.P.; PODGORETSKIY, Ye.K.

Fractionation of cellulose triacetate. Khim. volok. no.6:
70-71 '64. (MIRA 18:1)

1. Vsesoyuznyy nauchno-issledovatel'skiy kinofotoinstitut.

BPSEMENTNY, V.Ye.; BURDYGINA, V.S.; ZAKURDAYEVA, T.I.

Changes of some fertility elements in the takyrs under the
effect of land improvement measures. Izv. AN Turk. SSR. Ser.
biol. nauk no.1:29-33 '64. (MIRA 17:9)

1. Turkmenskiy nauchno-issledovatel'skiy institut zemledeliya.

ACCESSION NR: AR4023758
S/0274/64/000/001/A060/A060

SOURCE: RZh. Radiotekhnika i elektrosvyaz', Abs. 1A386

AUTHORS: Tereshchenko, A. I.; Zakurenko, O. Ye.

TITLE: Tuning a rectangular cavity by wall displacement

CITED SOURCE: Uch. zap. Khar'kovsk. un-t, v. 132, 1962, Tr. Radio-fiz. fak., v. 7, 86-89

TOPIC TAGS: cavity, resonator, rectangular cavity, cavity tuning, variable dimension cavity, cavity Q variation, cavity tuning range

TRANSLATION: Results are presented of a theoretical investigation of the tuning of a rectangular resonator by varying one of its dimensions. It is shown that the greatest tuning range is attained for the simplest H_{101} mode. A family of tuning curves for the resonator and of the variation of its Q as functions of the ratio $\lambda/2a$,

Card 1/2

ACCESSION NR: AR4023758

where λ is the wavelength after deformation and a is the deformed dimension of the resonator, is presented. The results of the calculations lead to the following principal conclusions: 1. The initial rate of tuning relative to the dimension a increases with increasing ratio $\lambda/2a$. 2. The closer the initial ratio $\lambda_0/2a$ to unity, the larger the tuning range. 3. The relative change in Q increases with increasing initial value of $\lambda_0/2a$. 4. The absolute value of the initial Q_0 decreases linearly with increasing ratio $\lambda/2a$. The calculation results make it possible to solve practically all problems connected with the tuning of a cavity resonator by moving its wall (the attainment of maximum and minimum tuning rates, the attainment of a maximum tuning range for specified limits of variation of Q , etc.).
O. N.

DATE ACQ: 03Mar64

SUB CODE: GE, SD

ENCL: 00

Card 2/2

ACCESSION NR: AR4014769

S/0058/63/000/012/H018/H018

SOURCE: RZh. Fizika, Abs. 12Zh125

AUTHOR: Tereshchenko, A. I.; Korobkin, V. A.; Zakurenko, O. Ye.

TITLE: Tuning of H-section resonator by means of ferrite

CITED SOURCE: Uch. zap. Khar'kovsk. un-t, v. 132, 1962. Tr. Radio-fiz. fak., v. 7, 78-85

TOPIC TAGS: H-section resonator, H-section cavity, ferrite tuning, field distribution, Q factor, critical wavelength, frequency variation, frequency tuning

TRANSLATION: Expressions for the Q and for the field distribution in a H-section resonator without ferrite were obtained by calculating the fields in the H-section waveguide. Perturbation theory with the use of the quasistatic approximation of the field inside the

Card 1/2

ACCESSION NR: AR4014769

ferrite was then used to obtain formulas for the frequency variation of an H-section or π -section resonator with a transversely-magnetized ferrite plate on the side wall. Plots of the frequency variation against the magnetic field are given for different transverse dimensions of the resonator. It is shown that the frequency variation depends strongly on the closeness of the resonant frequency λ_0 to λ_{cr} , which is the critical wavelength of a waveguide having the same transverse dimensions as the resonator; the deviation increases with the increasing ratio λ_0/λ_{cr} . An experimental test was made at a frequency of 3000 Mc with plates 1.5 and 3 mm thick. The experimental data coincide with the calculated ones. Ye. Lebedeva.

DATE ACQ: 24Jan64

SUB CODE: PH, GE

ENCL: 00

Card 2/2

L 10051-63

BDS

ACCESSION NR: AR3000390

S/0058/63/000/004/H025/H025

49

SOURCE: RZh. Fizika, Abs. 42h149

AUTHOR: Korobkin, V. A.; Tereshchenko, A. I.; Zakurenko, O. Ye.

TITLE: Retuning of a resonator of cruciform cross section with the aid of a ferrite plate located on the side wall

CITED SOURCE: Uch. zap. Khar'kovsk. u-t, v. 121, 1962, Tr. Radiofiz. fak., no. 5, 49-55

TOPIC TAGS: microwave cavities, cruciform section, tuning range, ferrite slug

TRANSLATION: Calculations are presented for the retuning of a waveguide cavity with cruciform cross section by means of a ferrite plate located on the side wall. The calculation is by the perturbation method assuming a quasi-static internal field in the ferrite. It follows from the calculations that the amount of retuning is proportional to the ratio of the resonant wavelength to the critical wavelength, i.e., it is the larger, the higher the ledge. Therefore a cavity

Card 1/2

L 10051-63

ACCESSION NR: AR3000390

0
with cruciform transverse cross section should have a large tuning range compared with a rectangular cavity. To check on the calculations, the retuning of a rectangular and cruciform resonator with identical resonant frequency was checked experimentally. The increased tuning range of the cruciform cavity, as compared with the rectangular one, was found to be somewhat less than given by the calculations. Ye. Lebedeva

DATE ACQ: 14May63

ENCL: 00

SUB CODE: PH,SD

cs/ ja
Card 2/2

ZAKURENOV, V. M., Cand of Phys-Math-Sci --- (diss) "Investigation of the Temperature-Frequency Absorption of Ultrasonic Waves in the Esthers of Formic Acid by the Pulse Method,"

Moscow, 1959, 12 pp (Moscow Oblast Pedagogical Institute imeni N. K. Krupakaya)

(KL, 6-60, 120)

ZAKURENOV, V. M.

PHASE I BOOK EXPLOITATION SOV/5644

Vserossiyskaya konferentsiya professorov i prepodavateley pedagogicheskikh institutov

Primeneniye ul' traukustiki k issledovaniyu veshchestva. vyp. 10. (Utilization of Ultrasonics for the Investigation of Materials. no. 10) Moscow, Izd-vo MOPI, 1960. 321 p. 1000 copies printed.

Eds.: V. F. Nozdrev, Professor, and B. B. Kudryavtsev, Professor.

PURPOSE: This book is intended for physicists and engineers interested in ultrasonic engineering.

COVERAGE: The collection of articles reviews present-day research in the application of ultrasound in medicine, chemistry, physics, metallurgy, ceramics, petroleum and mining engineering, defectoscopy, and other fields. No personalities are mentioned. References accompany individual articles.

Card 1410

Utilization of Ultrasonics (Cont.)

SOV/5644

- Belinskaya, L. B., and B. A. Belinskiy [Moscow Oblast Polytechnical Institute imeni Krupskaya]. Energy Losses in the Electrical and Acoustical Lines of a Pulsed Ultrasonic Device 255
- Gershenzon, Ye. M. [MGPI im. V. I. Lenina - Moscow State Pedagogical Institute]. The Passage of Electromagnetic Centimeter-Length Waves Through a Longitudinal Ultrasonic Screen 265
- Zakurenov, V. M. [Shuyskiy pedinstitut - Shuya Pedagogical Institute]. The Problem of Ultrasonic-Wave Absorption in Complex Esters of Formic Acid 269
- Zalivchiy, V. N. [Moscow Oblast Polytechnical Institute imeni N. K. Krupskaya]. The pulse Method of Studying

Card 9/10

S/058/51000/010/098/100
A001/101

AUTHOR: Zakurenov, V.M.

TITLE: Investigation of propagation velocity of ultrasonic waves in formates by the pulse method on the basis of the saturation line

PERIODICAL: Referativnyy zhurnal. Fizika, no. 10, 1961, 336, abstract 10Zh452 ("Uch. zap. Mosk. obl. ped. in-ta", 1960, v. 92, 185 - 198)

TEXT: The sound velocity was measured at temperatures from -40 to $+260^{\circ}\text{C}$ in butyl- (I) and propyl formates (II). Velocity decreases linearly: $\Delta c/c_0 \Delta t = -0.00304 \text{ degree}^{-1}$ for (I) and $-0.00301 \text{ degree}^{-1}$ for (II), where c_0 is velocity at 0°C . Experimental data for different formates were compared on the basis of the law of corresponding states. The Raoult-law was checked; it does not hold in the critical region. Coefficient of adiabatic compressibility has been determined. Heat capacities c_p and c_v of propyl formate are approximately determined; at the critical point c_v is finite, but c_p tends to infinity.

L. Zarembo

[Abstracter's note: Complete translation]

Card 1/1

24.1900

30504
S/194/61/000/008/054/092
D201/D304

AUTHOR: Zakurenov, V.M.

TITLE: The saturation line pulse method of studying the velocity of propagation of ultrasonic waves in complex ester formates

PERIODICAL: Referativnyy zhurnal. Avtomatika i radioelektronika, no. 8, 1961, 8-9, abstract 8 E63 (Uch. zap. Mosk. obl. ped. in-ta, 1960, 92, 185-198)

TEXT: The velocity of propagation of ultrasound was studied in propyl formate (PF) and butyl formate (BF) at temperatures from -40 to +260°C and at frequencies 5-12 mc/s. The velocity decreases linearly with increasing temperature, the slope of the line for PF and BF being 0.00301 and 0.00304 respectively multiplied by the respective velocities at 0°C. This principle of conformal states was checked for PF, BF, methyl and ethyl formate which agrees within 5-10% for all respective temperatures. It was shown experi-

Card 1/3

✓

30504
S/194/61/000/008/054/092
D201/D304

The saturation line...

mentally that for the first four homologues of the formate series, the principle of conformal states is satisfied for adiabatic compressibility and stiffness; it has been established that the dependence of velocity on the respective density of several ester formates is expressed by approximately a single curve. Reasons are given for the possible deviations from the principles of conformal states. It has been established that the coefficient of adiabatic compressibility increases exponentially with temperature. At constant temperature the adiabatic compressibility decreases with increasing molecular weight. The Bekker-Nozdrev and Raoult's laws and the Lagemann ratio have been confirmed experimentally. It is shown that Raoult's rule satisfies the principle of conformal states, while the Lagemann ratio for fluids of one homologous series only, satisfies this principle in approximation only (with an accuracy of 19%), the accuracy being increased for liquids near their critical temperatures. In the study of US velocities by the saturation line method in PF near the critical temperature, a dependence in temperature has been established of specific thermal capacities at constant pressure

Card 2/3

✓

The saturation line...

^{3050h}
S/194/61/000/008/054/092
D201/D304

and volume. Their ratio has also been calculated at critical points for the liquid PF phase. The results obtained are in qualitative agreement with those of other authors. 9 figures. 2 tables. 17 references. [Abstracter's note: Complete translation]

Card 3/3

X

ZAKURENOV, V.M.

Measuring the propagation velocity of ultrasonic waves in esters of
formic acid by the pulse method along the saturation line. Uch.
zap. MOPI 92:185-198 '60. (MIRA 14:9)
(Ultrasonic waves--Speed) (Formic acid)

KUZNETSOVA, Ye.M.; ZAKURIN, N.V.; NIKITIN, O.T.

Isotopic effect during distribution of titanium compounds
between water and ether. Zhur.neorg.khim. 7 no.3:676-677
Mr '62. (MIRA 15:3)
(Titanium—Isotopes) (Titanium compounds)

ZAKURKO, A.S.

Potatoes and vegetables of the southern (suburban) zone of the
Maritime Territory. Soob.DVFAN SSSR no. 15:105-108 '62.
(MIRA 17:9)

1. Dal'nevostochnyy filial imeni Komarova Sibirskogo otdeleniya
AN SSSR.

ZAKURSZKIJ, B. [Zakurskiy, B.]

Researchers of new methods. Ujit lap 12 no.8:3 25 Ap '60.

ZAKUSHEV, F., and DUMANSKIY, A. V.

"Colloidal-chemical processes in the drying of bread. Sbornik 1. Colloids in the Processes of the Food Industry," *Pishchepromizdat*, 1946, 4.

POTAPOV, Kh.; ZAKUSILO, P.

Hidden potentialities for reducing production costs on collective farms. Vop.ekon. no.9:111-119 S '61. (MIRA 14:8)
(Collective farms—Costs)

POTAPOV, Kh.; ZAKUSILO, P.

Ways to economize on expenditures for agricultural production.
Vop. ekon. no.12:60-69 D '62. (MIRA 16:1)

(Collective farms—Costs)

STOROZHEV, V.I.; KORKUNOV, I.N.; RUDAKOV, Ye.V.; MELLINYY, S.A.;
LUKOVNIKOVA, S.V.; POTAPOV, Kh.Ye.; ZAKUSILO, P.S.;
ZAVERENYAYEVA, L.V., red.; GERASIMOVA, Ye.S., tekhn. red.

[Triumph of the Lenin cooperative plan in socialist
countries] Pobeda leninskogo kooperativnogo plana v str-
nakh sotsializma. Moskva, Izd-vo ekon. lit-ry, 1963. 274 p.
(MIRA 16:4)

1. Akademiya nauk SSSR. Institut ekonomiki mirovoy sotsiali-
sticheskoy sistemy.

(Europe, Eastern--Agriculture, Cooperative)
(Collective farms)

POTAPOV, Khariton Yefremovich; ZAKUSILO, Pavel Stepanovich; KALASHNIKOVA,
V.S., red.; TRUKHINA, O.N., tekhn. red.

[Ways of lowering unit costs of production on collective farms]
Puti snizheniia sebestoimosti produktsii v kolkhozakh. Moskva,
Gos. izd-vo sel'khoz. lit-ry, 1960. 142 p. (MIRA 14:7)
(Collective farms—Costs)

ZAKUSILO, P.S.

Methodology of the accounting for costs of collective farm production ("Production costs on collective farms." Reviewed by P. Zakusilo). Vop. ekon. no. 2:114-118 F '61. (NIPA 14:2)
(Agriculture--Costs)

ZAKUSILO, U. I.

AUTHORS:

Borisenko, I. V., Belator, M. V., Vayov, Yu. S., Sifronovich, A. A., Mavitskiy, Z. A., Ryabov, A. S., Zubov, G. I., To-
harov, Yu. P., Matush, P. I.

TITLE:

A Machine-Tool for Producing Hoops (Simot dlya izgotovleniya
obruchoy)

PERIODICAL:

Byulleten' izobreteniy, 1959, Nr 6, p 18 (2552)

ABSTRACT:

Class 7c, 33. Br 11928 (592918 of 7 Sep 1957). Submitted
to the Committee for Inventions and Discoveries at the Mi-
nistre Council of USSR. A machine consisting of a drive
roller, and a crank press; in order to produce corrugated
hoops, the drive roller is connected to the rollers for mechanically
feeding the strip from the coil; the rollers are provided
with an inbuilt device for twisting strip into a spiral;
a shaft for automatic feed of strip to the press, and disc
for hoop ends is also included.

Card 1/1

A Method of Obtaining Artificial Skin Leather for the Up-ers of Footwear
as deep or deeper than the thickness of the coating film,
and in the second case - by coating the film with the film
material only up to the upper edge of the flanges (projec-
tions).

Card 2/2